SRT range

Polyester pumping stations

3 possible configurations

General description

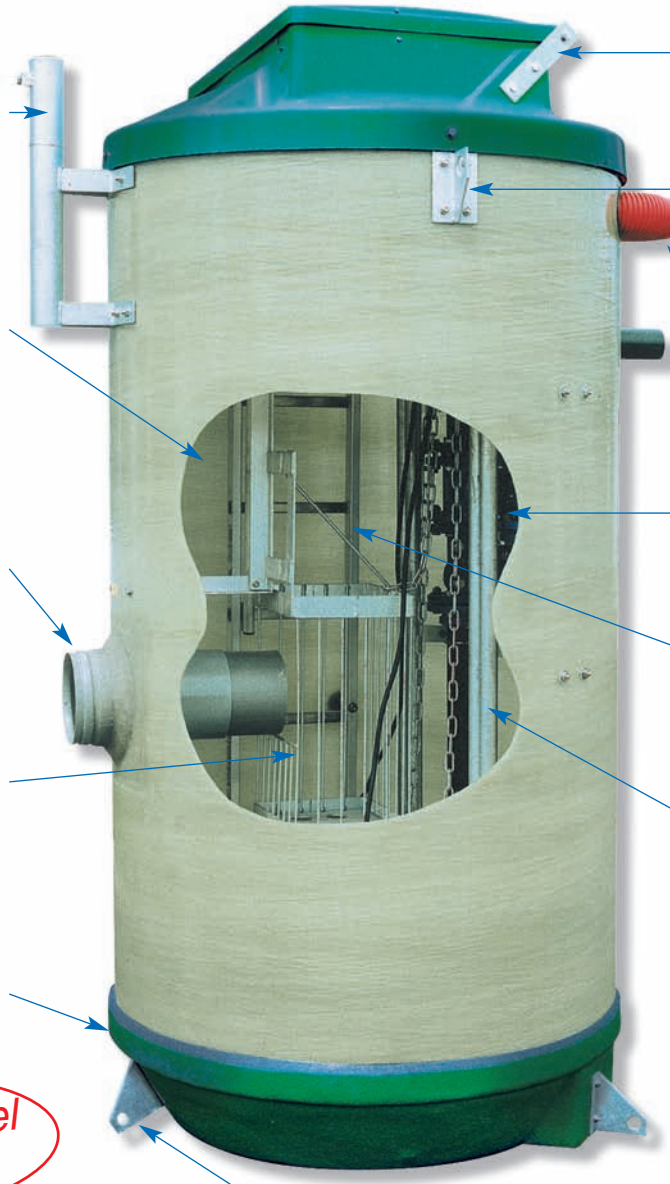

Hoist arm support

Glazed internal walls
to avoid grease accumulation

Inlet sleeve
with gasket, performed to adapt to the nature and diameter of the pipe

Screen basket
(option)

Tank bottom
Self-cleaning, integrated slope and reinforcement bars

Stainless steel hardware

Base with polyester cover
(in series execution)

Hoisting lug

2 meters of ducting
for cable guidance

Non return valve and shutter
for each pump

Aluminium ladder
with detachable bracket (optional)

Guiding bars



Anchoring feet
On concrete slab for models ø 1,400 mm and over
on the ø 1,000 and 1,200 mm models the anchoring feet are integrated

We also offer 3 configurations for NRV and shutter installation:

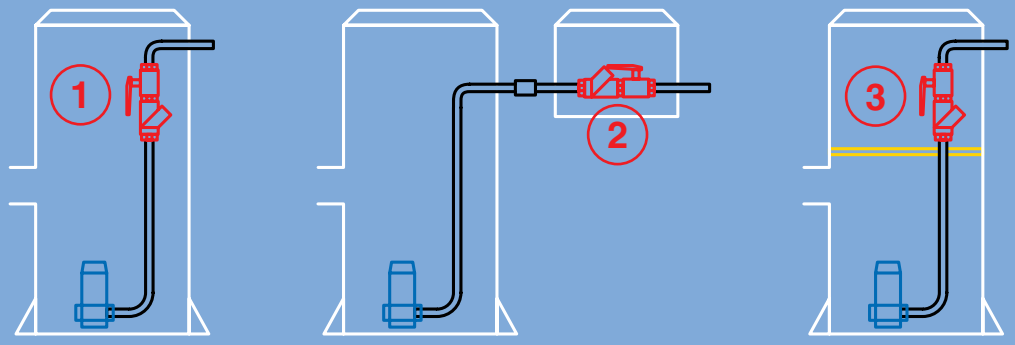

NRVs and shutters inside the station | **NRVs and shutters in an external valve chamber** | **NRVs and shutters + technical floor**